

DS-D5022QE-B 22" LCD Display Monitor



Hikvision's DS-D5022QE-B 22-inch LCD monitor provides excellent color rendition and enhanced, 1080p resolution. It features an LED direct-lit backlight with uniform brightness and no boundary shadow.

The DS-D5022QE-B is constructed of high-quality components and materials for 24/7 use.


Available Models:
DS-D5022QE-B

- 1080p Resolution
- LED Backlit Technology
- Wide Angle View: 170° (H)/160° (V)
- 3D Comb Filter
- 3D De-Interlace
- 3D Noise Reduction
- Multiple Inputs: HDMI, VGA
- Highly Reliable 24h/Day Functioning

Specifications

DS-D5022QE-B	
Display Type	LED Backlit TFT LCD
Screen Size	21.5"
Pixel Pitch (H x V)	0.248 mm x 0.248 mm
Maximum Resolution	1920 x 1080
Brightness	250 cd/m ² (typical)
Contrast	1000:1
Response Time	5 ms
Color	16.7 M
Viewing Angle	Horizontal 170°, vertical 160°
Interface	
VGA	1
HDMI	1
Mounting	
VESA	100 mm x 100 mm
General	
Power Supply	100 to 240 VAC, 50/60 Hz
Consumption	< 30 W (on), < 0.5 W (standby)
Operating Temperature	32° F to 104° F (-20° C to 50° C)
Operating Humidity	10% to 85% (no condensation)
Storage Temperature	-4° F to 131° F (-20° C to 122° C)
Storage Humidity	5% to 95% (no condensation)
Dimensions (W x H x D)	20.11" x 12.32" x 6.69" (511 mm x 313 mm x 170 mm)
Weight	Gross weight: 10.13 lbs (4.5 kg), net weight: 7.05 lbs (3.3 kg)
Included Accessories	VGA cord x 1, power cord x 1, user manual x 1, base bracket x 1

Interface

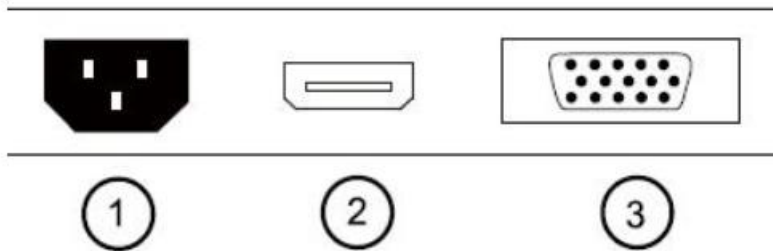

Number	Description
1	Power Input
2	HDMI Digital Signal Input
3	VGA Analog Signal Input

Accessories

